
HYDROSILA
Лєда


Phone:
+ 38 (099) 552-97-36

Клапан запобіжний (обриву) VUBA HSVP з корпусом MFF

# TECHNICAL CARD

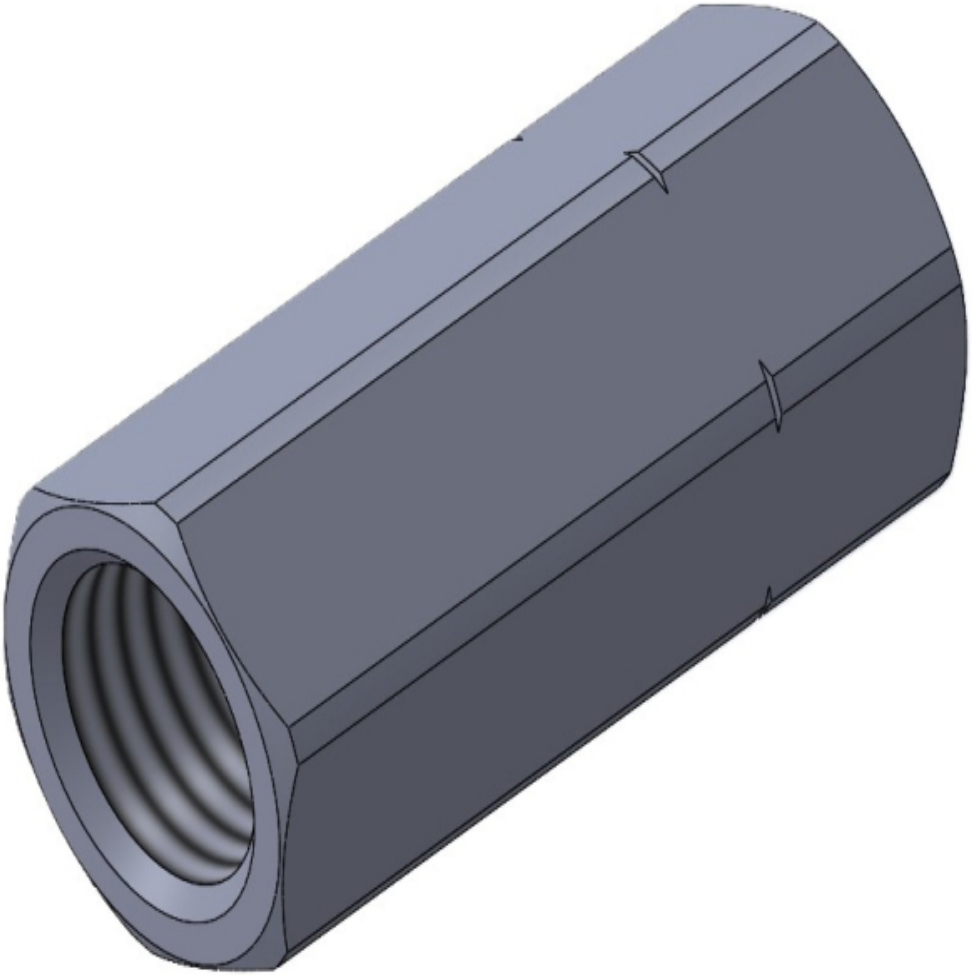

Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.



**Клапан запобіжний (обриву) VUBA HSVP з корпусом MFF**

| | |
|---|---|
| Максимальний робочий тиск | 350 bar |
| Максимальна витрата: | від 20 л/хв. до 150 л/хв. |
| Макс. Витік (0÷5крапель/хв) | 0 ÷ 0.25 cm3 /min |
| Гідравлічна рідина | DIN 51524 Mineral oils |
| В'язкість рідини | 10 ÷ 500 mm2 /s |
| Температура рідини | -25°C ÷ 75°C |
| Температура навколишнього середовища | -25°C ÷ 60°C |
| Макс. контамін. клас рівня з фільтром | ISO 4406:1999 - class 19/17/14 |