
HYDROSILA
Лєда

Phone:
+ 38 (099) 552-97-36

Клапан запобіжний (обриву) VUBA HSVP з корпусом MMF

TECHNICAL CARD

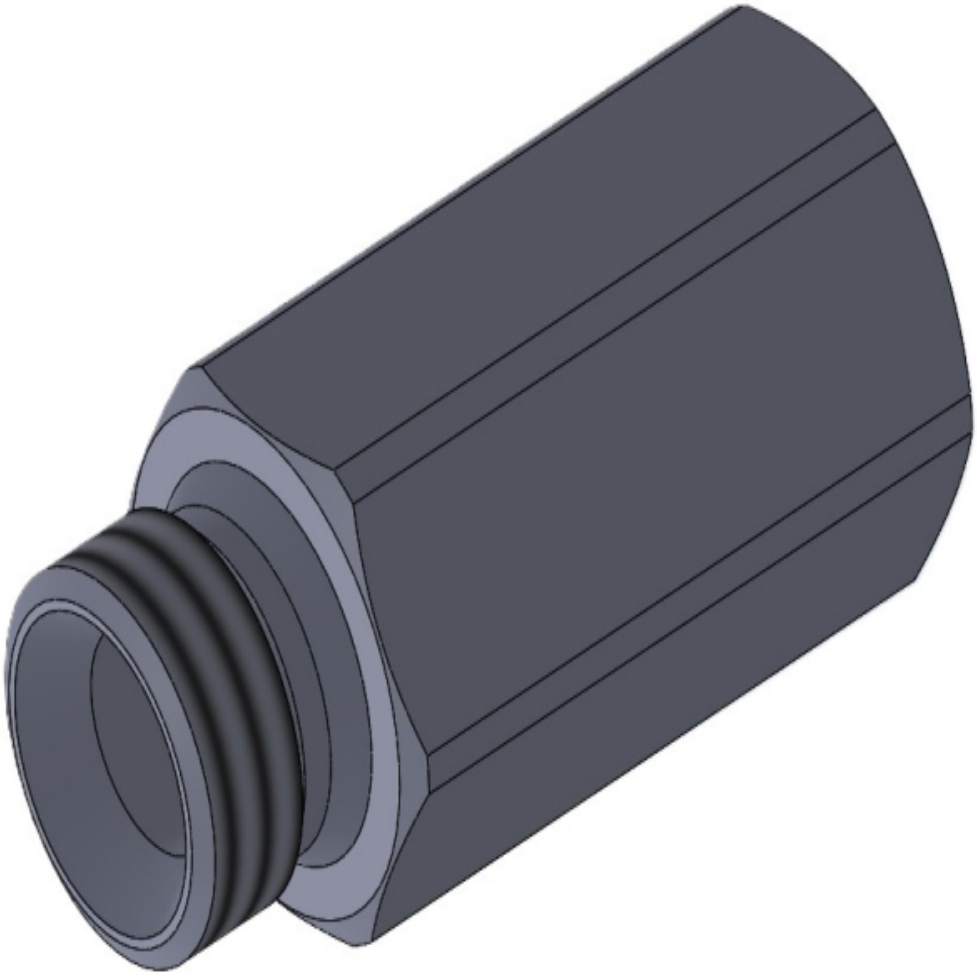

Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.



Клапан запобіжний (обриву) VUBA HSVP з корпусом MMF

Максимальний робочий тиск	350 bar
Максимальна витрата:	від 20 л/хв. до 150 л/хв.
Макс. Витік (0÷5крапель/хв)	0 ÷ 0.25 cm3 /min
Гідравлічна рідина	DIN 51524 Mineral oils
В'язкість рідини	10 ÷ 500 mm2 /s
Температура рідини	-25°C ÷ 75°C
Температура навколишнього середовища	-25°C ÷ 60°C
Макс. контамін. клас рівня з фільтром	ISO 4406:1999 - class 19/17/14