
Phone:
+ 38 (099) 552-97-36

Зворотній клапан HCV-08-B

TECHNICAL CARD



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

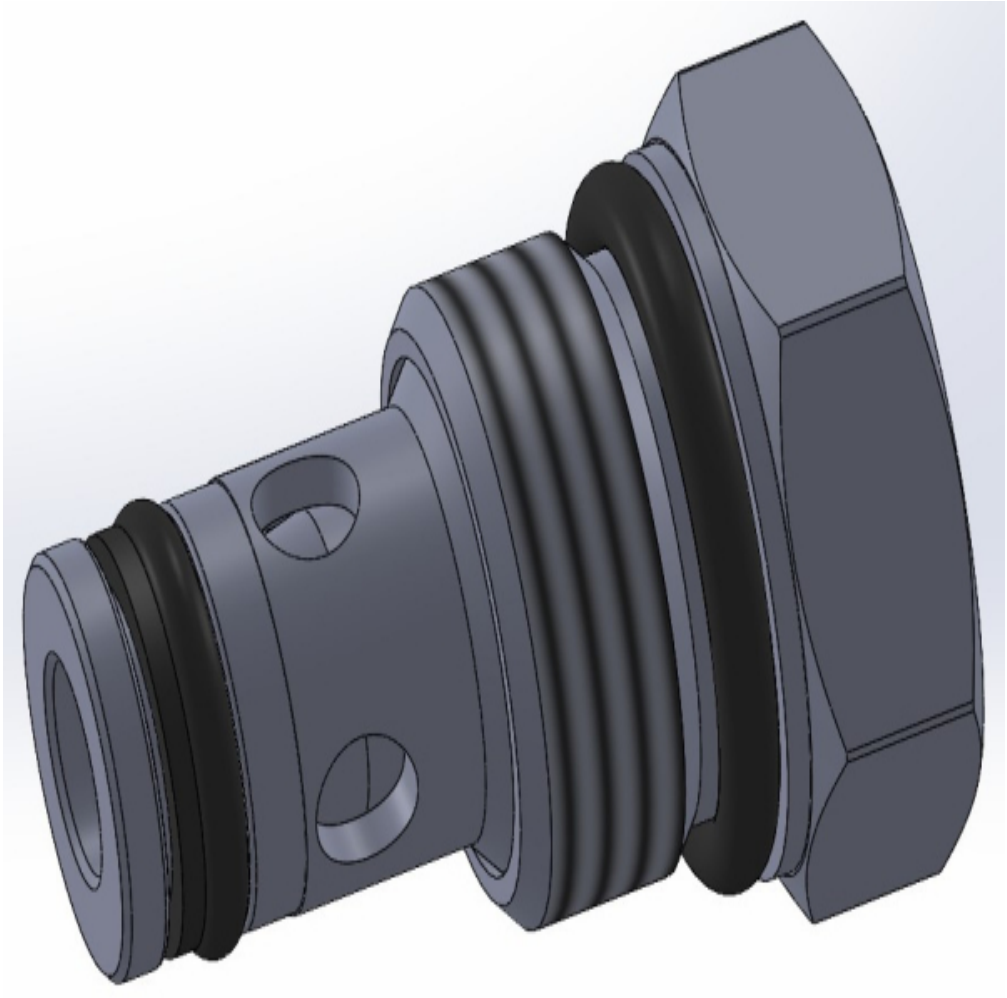

Зворотній клапан HCV-08-B

Максимальний робочий тиск	420 bar
Максимальна витрата:	50 л/хв.
Внутрішній витік	макс. 0,10 см3/хв при 420 бар
Рідини	на мінеральній основі або синтетичні з мастильними властивостями
Гідравлічна рідина	ISO VG 46 cSt
В'язкість рідини	від 7,4 до 420 сСт
Температура рідини	від -30° C до 110° C
Фільтрація	20/18/15 ISO 4406 (максимально допустима фільтрація)